



**ALUMINIUM
SCAFFOLDING
MANUFACTURER**



SALES, RENTAL & SERVICES

+91 8577857700, +91 9811111784

WWW.SKYLINESCAFFOLDINGS.COM




WELCOME TO SKYLINE SCAFFOLDINGS

At Skyline Scaffoldings, we believe that every project tells a story. A story of safety, strength, and unwavering reliability.

What started as a simple idea, to create robust, high-performance aluminium scaffolding solutions that protect and empower. Skyline Scaffoldings has grown into a trusted name designed to elevate modern construction. Whether you are discovering us for the first time or are part of our loyal community, we're so glad you're here.

Each item in our catalog has been thoughtfully engineered with you in mind. From design to delivery, our commitment remains the same: quality, integrity, and authenticity in everything we do.

Thank you for being a part of our journey.





PRODUCT SAFETY ADVANTAGES



STAIRCASE

For comfortable climbing and descent, particularly with bulky loads.




CLAW

Throttled claw-brace attachment with colour identification.



TIG WELDING

Gas Tungsten Arc Welding (GTAW) ensures superior strength, quality and safety.

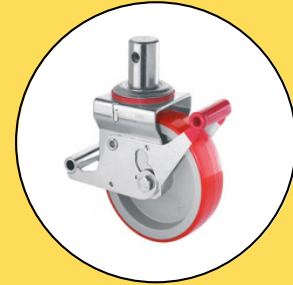

SWIVEL CASTOR WHEEL

Easy unlock wheels with upto 30cm height adjustment.

TRIANGULAR STABILIZER

Telescopic support made with pivot foot for uneven surfaces.



NARROW SERIES



SKY-N SERIES

DIMENSION:-
1.8M X 0.75M (L X W)

HEIGHT RANGE:-
2M TO 13M (PLATFORM)

FRAME MATERIAL:-
HIGH STRENGTH ALUMINIUM ALLOY
(GRADE 6063-T6)

FRAME TUBE DIAMETER:-
50.8MM

Certificate
EN 1004
Norm

Skyline's (SKY-N Series) Narrow scaffolding tower fits a single platform per level and is apt for accessing heights where area is inhibited. It is used in installation works, maintenance and construction work.

It requires lower erection time, cost & labour while it also saves energy & boosts production.



NARROW SERIES (SKY-N) SCAFFOLD SIZE 1.8M x 0.75M (L x W)												
Model No.	SKY-N023	SKY-N034	SKY-N045	SKY-N056	SKY-N067	SKY-N078	SKY-N089	SKY-N0910	SKY-N1011	SKY-N1112	SKY-N1213	SKY-N1314
Platform Height (M)	2.2	3.2	4.2	5.2	6.2	7.2	8.2	9.2	10.2	11.2	12.2	13.2
Tower Height (M)	3.2	4.2	5.2	6.2	7.3	8.2	9.2	10.2	11.2	12.2	13.2	14.2
Working Height (M)	4.2	5.2	6.2	7.2	8.2	9.2	10.2	11.2	12.2	13.2	14.2	15.2

*use the scaffold as per instruction manual

WWW.SKYLINESCAFFOLDINGS.COM

STAIRWAY SERIES



SKY-S SERIES

DIMENSION:-

1.8M X 1.35M (L X W)

HEIGHT RANGE:-

2.2M TO 14.2M (PLATFORM)

FRAME MATERIAL:-

HIGH STRENGTH ALUMINIUM ALLOY
(GRADE 6063-T6)

FRAME TUBE DIAMETER:-

50.8MM

Certificate

EN 1004

Norm

Skyline's (SKY-S Series) Stairway scaffolding provides excellent safety owing to its staircase system, along with handrail feature. It is perfect for hefty load climbing in addition to granting access to elevated heights.

It is a secure, convenient mobile scaffold tower for persistent climbing.




STAIRWAY SERIES (SKY-S) SCAFFOLD SIZE 1.8M x 1.35M (L x W)												
Model No.	SKY-S023	SKY-S034	SKY-S045	SKY-S056	SKY-S067	SKY-S078	SKY-S089	SKY-S0910	SKY-S1011	SKY-S1112	SKY-S1213	SKY-S1314
Platform Height (M)	2.2	3.2	4.2	5.2	6.2	7.2	8.2	9.2	10.2	11.2	12.2	13.2
Tower Height (M)	3.2	4.2	5.2	6.2	7.3	8.2	9.2	10.2	11.2	12.2	13.2	14.2
Working Height (M)	4.2	5.2	6.2	7.2	8.2	9.2	10.2	11.2	12.2	13.2	14.2	15.2

*use the scaffold as per instruction manual

WWW.SKYLINESCAFFOLDINGS.COM

EXTRA REACH SERIES

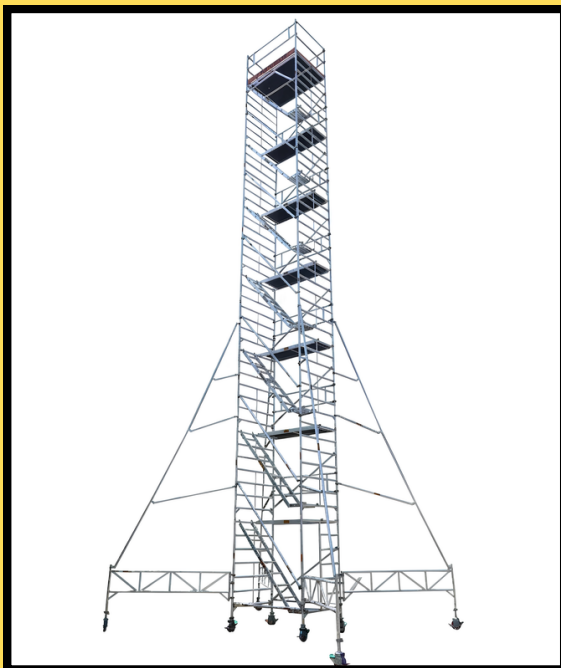

SKY-E SERIES

DIMENSION:-

1.8M X 1.35M (L X W)

HEIGHT RANGE:-

15.2M TO 20.2M (PLATFORM)

FRAME MATERIAL:-

HIGH STRENGTH ALUMINIUM ALLOY
(GRADE 6063-T6)

FRAME TUBE DIAMETER:-

50.8MM


Certificate

EN 1004

Norm

Skyline's (SKY-E Series) Extra Reach scaffolding provides exceptional elevation owing to its extendable tower system, along with reinforced mobile stabilization features. It is perfect for reaching extreme heights in addition to granting stability for overhead tasks.

It is a secure, versatile mobile scaffold tower for high-access maintenance.

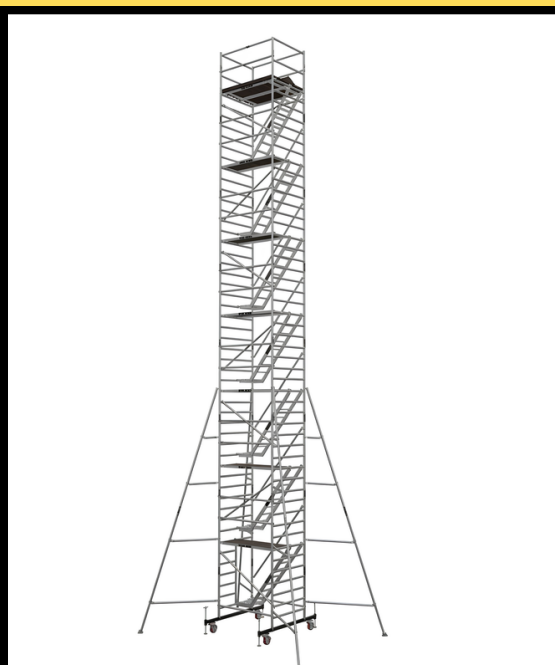

EXTRA REACH SERIES (SKY-E) SCAFFOLD SIZE 1.8M x 1.35M (L x W)						
Model No.	SKY-E1516	SKY-E1617	SKY-E1718	SKY-E1819	SKY-E1920	SKY-E2021
Platform Height (M)	15.2	16.2	17.2	18.2	19.2	20.2
Tower Height (M)	16.2	17.2	18.2	19.2	20.2	21.2
Working Height (M)	17.2	18.2	19.2	20.2	21.2	22.2

*use the scaffold as per instruction manual

WWW.SKYLINESCAFFOLDINGS.COM

BRIDGE SERIES



SKY-B SERIES

DIMENSION:-

5.2M X 1.8M (L X W)

HEIGHT RANGE:-

2.2M TO 12.2M (PLATFORM)

FRAME MATERIAL:-

HIGH STRENGTH ALUMINIUM ALLOY
(GRADE 6063-T6)

FRAME TUBE DIAMETER:-

50.8MM

Certificate
EN 1004
Norm

Skyline's (SKY-B Series) Bridge scaffolding provides excellent horizontal clearance owing to its suspended beam system, along with wide-span platform features. It is ideal for bridging complex gaps while offering expanded reach across hard-to-access areas.

It is a secure, heavy-duty mobile scaffold tower for elevated infrastructure work.



*use the scaffold as per instruction manual

WWW.SKYLINESCAFFOLDINGS.COM

CANTILEVER SERIES



SKY-C SERIES

DIMENSION:-
2.2M X 1.8M (L X W)

HEIGHT RANGE:-
2.2M TO 8.2M

FRAME MATERIAL:-
HIGH STRENGTH ALUMINIUM ALLOY
(GRADE 6063-T6)

FRAME TUBE DIAMETER:-
50.8MM

Certificate
EN 1004
Norm

Skyline's (SKY-C Series) Extra Reach scaffolding provides exceptional elevation owing to its extendable tower system, along with reinforced stabilization features. It is perfect for reaching extreme heights in addition to granting stability for overhead tasks.

It is a secure, versatile mobile scaffold tower for high-access maintenance.



*use the scaffold as per instruction manual

WWW.SKYLINESCAFFOLDINGS.COM

A-TYPE LADDER SERIES



SKY-A SERIES

HEIGHT RANGE:-
6FT - 12FT

DUAL-SIDED ACCESS

SELF-SUPPORTING FRAME

INTEGRATED LOCKING SPREADERS

NON-SLIP STEPS

LIGHTWEIGHT MOBILITY

LOCALIZED ELEVATION

Skyline's (SKY-A Series) A-Type Ladder provides excellent stability owing to its dual-sided frame system, along with self-supporting locking features. It is perfect for balanced twin-sided access in addition to granting reach for localized overhead work.

It is a secure, flexible mobile platform for routine on-site operations.



WWW.SKYLINESCAFFOLDINGS.COM

FRP LADDER SERIES



SKY-F SERIES

HEIGHT RANGE:-
6FT - 12FT

FIBER-REINFORCED

ELECTRICAL INSULATION

HIGH STRENGTH-TO-WEIGHT RATIO

SPARK-PROOF SAFETY

SLIP-RESISTANT STEPS & HANDRAIL

CORROSION RESISTANCE

Skyline's (SKY-F Series) FRP Ladder provides excellent non-conductive safety owing to its fiberglass frame, along with high-voltage insulation features. It is perfect for electrical environments.

It is a secure, spark-proof mobility unit for demanding utility tasks.



WWW.SKYLINESCAFFOLDINGS.COM



WWW.SKYLINESCAFFOLDINGS.COM



WWW.SKYLINESCAFFOLDINGS.COM



WWW.SKYLINESCAFFOLDINGS.COM



TRUSTED BY INDIA'S INDUSTRIAL LEADERS



WWW.SKYLINESCAFFOLDINGS.COM

OUR LOCATIONS



GURGAON

NOIDA

LUCKNOW

PUNE

BENGALURU

AHMEDABAD

WWW.SKYLINESCAFFOLDINGS.COM



 SAME DAY DELIVERY  INSTALLATION SERVICES

**SALES,
RENTAL &
MANUFACTURER OF
ALUMINIUM SCAFFOLDING**



Scan Code For More Details



Reg. Office: 13, Near Guru Nanak Farmhouse, Sukhrali Enclave, Sector 17, Gurgaon - 122001 (HR)
Phone: +91 8577857700, +91 9811111784 | **Email:** info@skylinescaffolding.com

WWW.SKYLINESCAFFOLDINGS.COM